



## ILEE® JULA+

### CHARACTERISTICS

- Colimated dot laser
- Laser in X-Y axis adjustable
- $\pm 20$  mrad angle of adjustment travel
- 0.24 mrad adjustment per click
- Two mounting options using either diameter  $\varnothing 22$  mm or diameter  $\varnothing 18$  mm  $+0/-0.1$  tolerance fit
- Switching on and off via pushbutton or optional remote control
- AR coated glass lens
- Battery powered (DL1/3N)

### APPLICATIONS

- Pointing
- Alignment
- Positioning


## TECHNICAL DATA

Wave-length <sup>1)</sup> nm	Optical output mW	Beam shape	Laser class <sup>2)</sup>	Divergence <sup>3)</sup> mrad	Wavelength shift <sup>4)</sup> nm/°C	Output power stability <sup>4)</sup> % 25°C	Order number
• 635	<1	Dot	2	<0.5	0.25	<0.5	0177-53-92-02
• 635	3.5	Dot	3R	<0.5	0.25	<0.5	0177-52-92-02

<sup>1)</sup> other wavelengths on request <sup>2)</sup> EN/ISO 60825-1 <sup>3)</sup> @FWHM <sup>4)</sup> after warmup



## DIMENSIONS (MM)

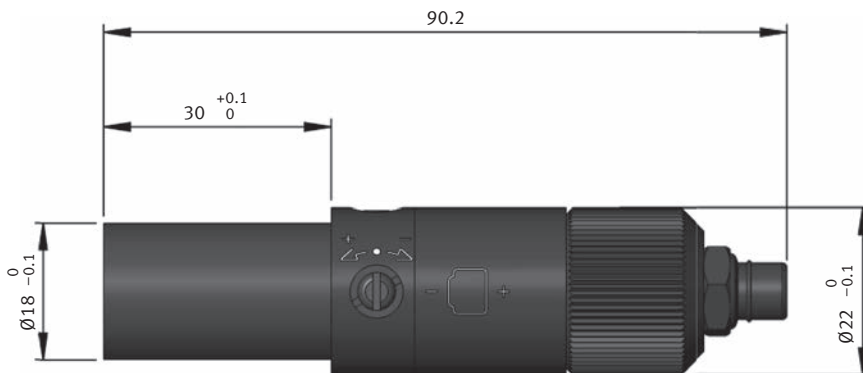

Laser beams can cause damage to your eyes.  
The user is responsible to observe the local safety regulations.

Mistakes and technical changes reserved.

### Rheinmetall Air Defence AG

Birchstrasse 155 · 8050 Zurich · Switzerland · Phone +4144 316 22 11  
ilee.rad@rheinmetall.com · www.rheinmetall.com/ilee

